

AREA-BASED MATCHING ALGORITHM ASSESSMENT  
FROM SATELLITE IMAGES  
(transparencies)  
(see [references](#) for the full text)

Gerald Jean Francis Banon  
Sergio Donizete Faria

National Institute for Space Research – INPE  
Image Processing Division – DPI  
CP 515  
12 201–970, São José dos Campos, SP, Brazil

Bordeaux, September, 2001

**CONTENT**

Matching algorithms  
Matching precision measure  
Experimental assessment  
References

## MATCHING ALGORITHMS

(1/2)

A matching algorithm is used to find,  
among a set of images  $\{g_1, \dots, g_n\}$   
the one which is the “closest” to a reference image  $f$ .

A matching algorithm may be based upon  
the minimization of a *distance*  $d$  or  
the maximization of a *similarity measure*  $s$ .

There exist pairs  $(d, s)$  such that the minimization based on  $d$  is  
**equivalent** to the maximization based on  $s$ .

Examples:  
(Euclidean distance, correlation coefficient)  
(City Block distance, morphological correlation).

**MATCHING ALGORITHMS**

(2/2)

In this work, we consider the following matching algorithms.

Correlation coefficient  
(Euclidean distance)

Barnea and Silverman, 1972; Maragos 1988  
(City Block distance)

Brunelli and Messelodi, 1995  
(estimation of the correlation coefficient)

Khosravi and Shafer, 1996  
(morphological approach)

Fernández, 1997  
(Chessboard distance)

Banon and Faria, 1997  
(morphological approach)

**MATCHING PRECISION MEASURE**

(1/2)

The images in  $\{g_1, \dots, g_n\}$  are extracted from a bigger image  $g$ .

The *Matching Region* is the set of pixel positions which have the greatest similarity.

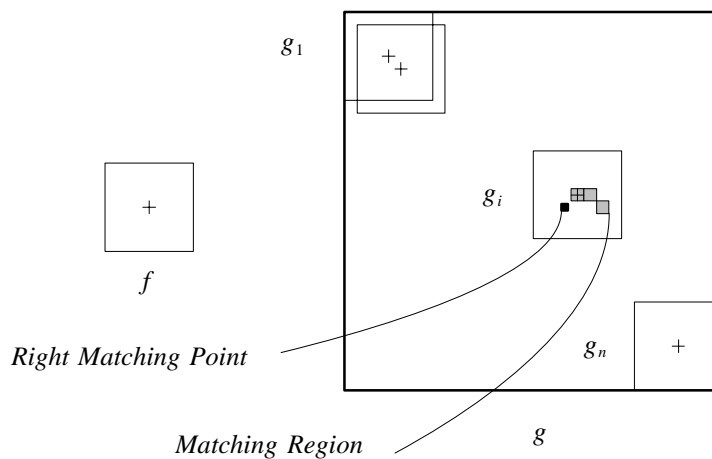


Fig. 1 – Matching Region and Right Matching Point.

## MATCHING PRECISION MEASURE

(2/2)

The matching degree between a Matching Region  $A$  and a Right Matching Point  $x$  is given by

$$\beta(A, x) = \alpha_1(A) \alpha_2(A, x) \alpha_3(A, x)$$

where

$\alpha_1(A)$  depends on the area of  $A$

$\alpha_2(A, x)$  depends on the minimum distance between  $A$  and  $x$

$\alpha_3(A, x)$  depends on the maximum distance between  $A$  and  $x$ .

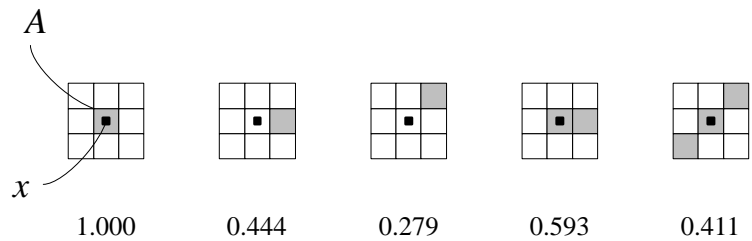


Fig. 2 – Some degrees of matching between a point and a subset.

**EXPERIMENTAL ASSESSMENT**

(1/2)

Five pairs of images were used.

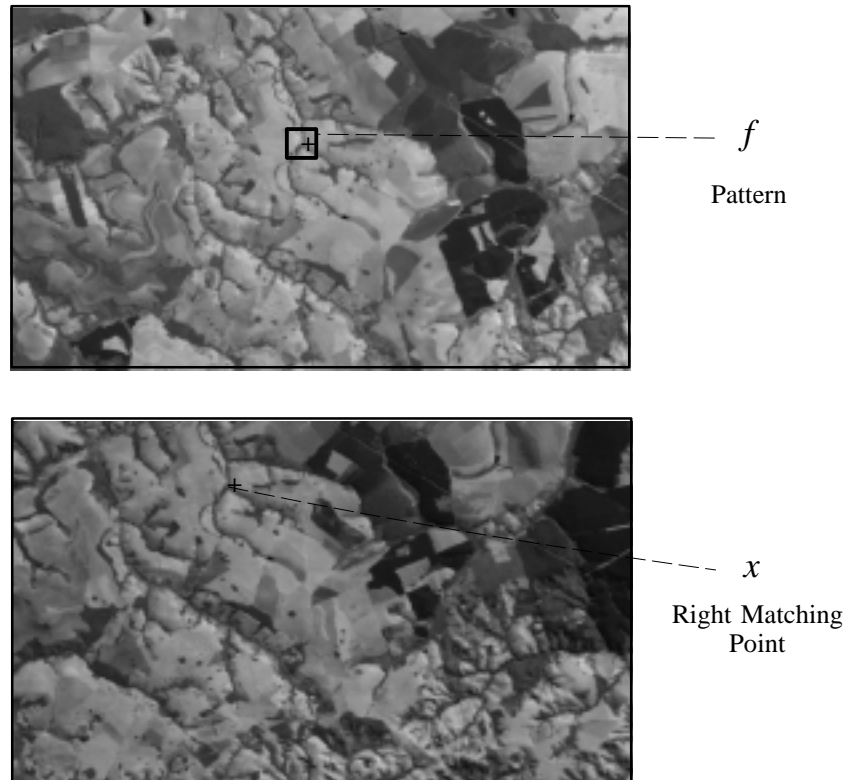


Fig. 3 – Example of an image pair.

**EXPERIMENTAL ASSESSMENT**

(2/2)

Ten  $23 \times 23$  patterns for each image pair were used.

Ranking of the matching algorithms.

<b>Matching algorithm</b>	<b>Degree of matching</b>
Correlation coefficient	0.958
Brunelli and Messelodi, 1995	0.912
Barnea and Silverman, 1972; Maragos 1988	0.882
Banon and Faria, 1997	0.678
Fernàndez, 1997	0.166
Khosravi and Schafer, 1996	0.154

Similarity measures in the literature are alternatives to the correlation coefficient.

However, none behaves better than the correlation coefficient.



**REFERENCES**

(1/2)

- Banon GJF, Faria SD (1997). Morphological approach for template matching. [online]. In: Brazilian Symposium on Computer Graphics and Image Processing, 10th., Campos do Jordão, October 14–17, 1997. Los Alamitos, IEEE Computer Society, 171–77. Deposited in the *URLib* collection, Repository <[dpi.inpe.br/banon/1997/05.23.15.08](http://dpi.inpe.br/banon/1997/05.23.15.08)> .
- Faria SD, Banon GJF (2001). Estudo comparativo de operadores para casamento de padrões. [online]. São José dos Campos. 73 p. (INPE–8184–RPQ/718). Technical Report – Instituto Nacional de Pesquisas Espaciais. Deposited in the *URLib* collection, Repository <[dpi.inpe.br/banon/2001/01.29.19.08](http://dpi.inpe.br/banon/2001/01.29.19.08)> .
- Banon GJF, Faria SD (2001). Area-based matching algorithm assessment from satellite images. In: 8th European Congress for Stereology and Image Analysis, Bordeaux, France, September 4 – 7, 2001. Deposited in the *URLib* collection, Repository <[dpi.inpe.br/banon/2001/04.27.15.43](http://dpi.inpe.br/banon/2001/04.27.15.43)> .
- Barnea DI, Silverman HF (1972). A class of algorithms for fast digital image registration. *IEEE Transactions on Computers*, 21(2):179–86.

**REFERENCES**

(2/2)

- Brunelli R, Messelodi S (1995). Robust estimation of correlation with applications to computer vision. *Pattern Recognition*, 28(6):833–841.
- Fernández X (1997). Template matching of binary targets in gray scale images: a nonparametric approach. *Pattern Recognition*, 30(7):1175–82.
- Khosravi M, Schafer RW (1996). Template matching based on a grayscale hit-or-miss transform. *IEEE Transactions on Image Processing*, 5(6):1960–66.
- Maragos P (1988). Optimal morphological approaches to image matching and object detection. In: *International Conference on Computer Vision*, 2nd, 695–99.